



FLUOLOG[®] Fluorinated greases ...

FLUOLOG[®] represents a range of greases based on perfluorinated oils. The FLUOLOG[®] greases are recommended when the other lubricants, mineral or synthetic, cannot meet the requested specifications.

- Exceptional high-temperature stability.
- Excellent chemical inertness (gas and aggressive liquids).
- Non-flammable.
- Total compatibility with plastics and elastomers.
- Very long life time.
- Very low friction.
- Very low vapour tension.
- Good resistance to nuclear radiations.
- Non toxic.



Performances Designation	Base oil ISO / NLGI Grade	Base oil Nature	Thickener Nature	% evaporation 24h	N.dfm	Continuous operating temperature range	Main applications
FLUOLOG K 258	7 / 2	PFPE B	PTFE	10 / 90°C	>800 000	-70...+80°C	Micro-Electro Mechanics LT [°]
FLUOLOG K 259	15 / 2	PFPE B	PTFE	10 / 120°C	>600 000	-60...+120°C	Micro-Electro Mechanics LT [°]
FLUOLOG KEL	15 / 2	PFPE B	PTFE	8 / 120°C	>400 000	-60...+120°C	Polyvalence LT [°]
FLUOLOG KEM	100 / 2	PFPE B	PTFE	2 / 150°C	>300 000	-40...+200°C	Polyvalence MT [°]
FLUOLOG KES	220 / 2	PFPE B	PTFE	0.5 / 150°C	>200 000	-35...+250°C	Polyvalence HT [°]
FLUOLOG 2 L	150 / 2	PFPE B	PTFE	0.7 / 150°C	>500 000	-35...+250°C	Bearings MT [°] /HT [°]
FLUOLOG LX 2	100 / 2	PFPE B	PTFE	2 / 150°C	>500 000	-40...+200°C	Long lasting MT [°]
FLUOLOG MX 2	220 / 2	PFPE B	PTFE	0.5 / 150°C	>300 000	-35...+250°C	Long lasting HT [°]
FLUOLOG MG 2	220 / 2	PFPE B	Gel	0.5 / 150°C	>300 000	-35...+250°C	Electric contacts
FLUOLOG LMX 2	100 / 2	PFPE L	PTFE	2.5 / 200°C	>800 000	-70...>220°C	Low torques LT [°]

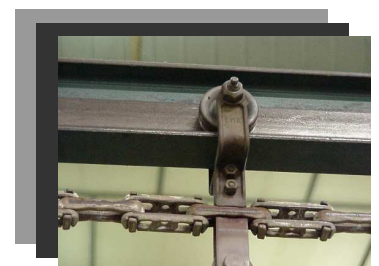

LUBRILOG S.A. – BP 60261–ZI des Chasses – 18 rue Nicolas Appert–F26106 ROMANS SUR ISERE- Cedex
Tel: (33)(0)4.75.45.26.00 Fax: (33) (0)4.75.45.18.65 - Web: www.lubrilog.com Email: contact@lubrilog.fr